



## OCM-030 COMPATTA

### DRY MIX SPRAYING MACHINE FOR GUNITITE, CONCRETE AND REFRACTORY MIXES.

The OCMER OCM-030 COMPATTA is a rotor machine for the dry spraying of gunitite, concrete and refractory mixes.

The well tried rotor working method together with the unique OCMER's hydraulic clamping system of the rotor between the lubricated gaskets guarantee a perfect operation even in extreme working conditions.

The fields of applications goes from small jobs such as joint filling to larger project like slope consolidation besides swimming pools construction, re-lining of damaged surfaces with pre-mixed materials. The machine is largely known and appreciated in the application with refractory gunning mixes typically into furnaces and chimneys.

The machine can be supplied with electric engines or pneumatic ones both of them with possibility to regulate the output at will. Other options are: the high pressure water pump, radio or cable remote control unit, dosing unit for the liquid chemical admixtures (DOSA version).

### SPECIALIZED TECHNICAL ADVICE



We offer specialized technical consultancy on specific projects, helping you find the solution best suited to your needs.

### CUSTOMIZATION



We actively collaborate to propose you tailor-made solutions through specially designed products or by modifying existing ones.



# OCM-030 COMPATTA

WEIGHTS 560-720 KG

Capacity of rotor litres	Max theoretical output M <sup>3</sup> /h (*)	Hose size mm	Grain size mm	Delivey Distance Horiz./Vert. M	Compressed air consumption M <sup>3</sup> /m at 7-8 BARS
1,8	1,51	25X40 32x48	8 10	500/100	2-4 3-5
3,2	2,69	32X48 40x60	10 13	500/100	3-6 4-7
3,4	2,86	32X48 40x60	10 13	500/100	3-6 4-7
5	4,20	40X60 50x70	13 16	500/100	5-8 6-10
6	5,04	50x70	16	500/100	6-12



(\*) Provided the chambers fill and empty completely

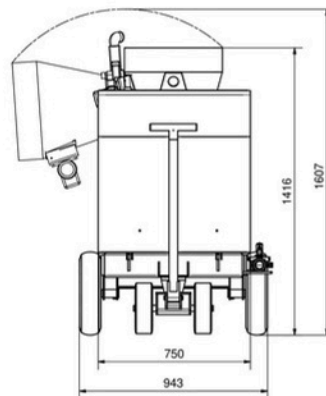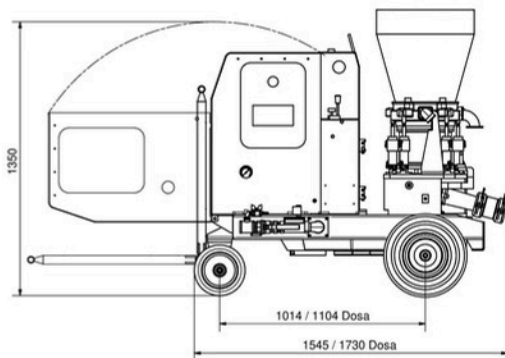

## ELECTRIC DRIVE

- Two speeds engine power: 2.5/4 KW; 3x400 Volt, 50 Hz
- Moto-inverter power: 3 KW; 3x400 Volt, 50 Hz
- Electric board: EEC NORM (EN-60204-1;
- EN-60439-1; 73/23/CEE; 93/68/EEC)
- Protection degree: IP 55

## PNEUMATIC DRIVE

- Main engine power: 6,5 KW
- Hydraulic power pack: 3 KW
- Air consumption (engines): 8.000 litres/min at 6-7 bars